

# Q1<sup>®</sup> Premium Masking Solutions






## Premium Masking Tape

Q1® Premium Masking Tape has been designed to deliver consistent unwinding, easy tearing and conformability. It performs extremely well when used tape on tape and with masking paper and protective film.

Premium crepe paper masking tape features natural rubber base adhesive. It is recommended for automotive car refinishing applications during drying cycles at high temperatures up to 230° F / 110° C. It is guaranteed to provide excellent adhesion and will not leave adhesive traces when removed.

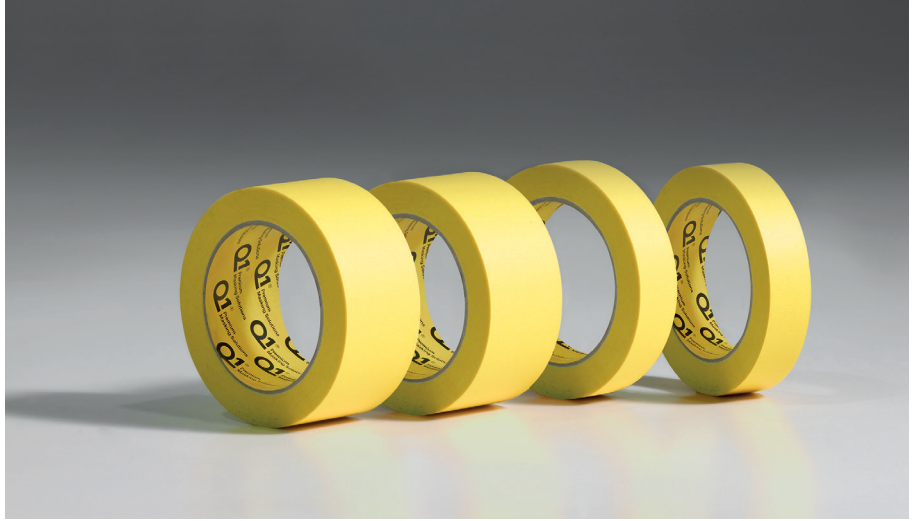

### Features

- High Performance natural rubber-based adhesive
- Saturated semi crepe paper
- Temperature resistant up to 230° F. / 110° C. (30 min.) 194° F. / 90° C. (60 min.)
- Excellent adhesion and physical features
- Compatible with all popular paints
- Excellent conformability to irregular surfaces

### Benefits

- Instant adhesion to all vehicle surfaces
  - Excellent holding power
  - Conforms well to curved surfaces without lifting or tearing
  - Resistant to waterborne and solvent-based coatings
  - Controlled unwind
  - Easy clean and removal without adhesive residues
- Delivers sharp and clean paint edges

### Temperature Resistance

30 min.	60 min.
230°F. / 110° C.	194° F. / 90° C.

### Product Reference

Part #	Size	Pcs/ Case
MT118	18mm x 55m	48 roll/case
MT136	36mm x 55m	24 roll/case
MT148	48mm x 55m	20 roll/case

**Premium  
Trim Masking**  
10 mm

Q1® Premium Trim Masking is designed to improve trim masking applications including: inset door handles, windscreen, side moldings, tail light, sidelight and headlight units. Delivers complete paint coverage under the molding while protecting the front of the molding from paint overspray during bake cycles.

Features a plastic strip on a self-adhesive tape with a flexible polyester band that support temperatures and a width of 10mm that supports temperatures up to 230° F. / 110° C without leaving any residue. Pre-cut every 38mm for easy application.



**Features**

- High performance rubber-based adhesive
- Specialty treated paper backing
- Temperature resistance up to 230° F. / 110° C. (30 min.) 194° F. / 90° C. (60 min.)
- Pre-perforated for easy tear off
- Very flexible to follow contours and tight curves
- Self-dispensing box
- Easy lifting tab and tape

**Benefits**

- Resists moisture and solvents
- Prevents paint bridging to molding with no bleed-through
- Conforms to curved surfaces without lifting or tearing
- One size fits all moldings
- Quick application - no cutting tools needed
- Saves time and labor costs of removing moldings
- Eliminates visible paint edges

**Temperature Resistance**

<b>30 min.</b>	<b>60 min.</b>
230° F. / 110° C	194° F. / 90° C.

**Product Reference**

<b>Part #</b>	<b>Size</b>	<b>Pcs/ Case</b>
TT01	10mm hard tab x 10 m	72 roll/case

## Premium Masking Drop Film

Q1® Premium Masking Drop Film is the perfect tool to protect parts of the vehicle that do not require painting.

The HDPE film has an electrostatic charge to attract the film onto the vehicle surface for a safe application. The Corona treatment provides strong adherence of the paint to the film.



### Features

- Excellent adhesion
- Temperature resistance up to 230° F. / 110° C. (30 min.) 194° F. / 90° C. (60 min.)
- Easy clean up and removal
- Solvent resistant
- Easy roll release
- Static cling

### Benefits

- Good physical strength
- Leaves no residue
- Paint will not bleed through
- Easy to apply

### Temperature Resistance

30 min	60 min.
230° F. / 110° C.	194° F. / 90° C.

### Product Reference

Part #	Size	Pcs/ Case
MDF0260	23.62" x 25 yds	24 roll/case
MDF02120	47.24" x 25 yds	24 roll/case
MDF02180	70.86" x 25 yds	24 roll/case

---

**Premium Protective Film**

Q1® Premium Protecting Film is a clear HDPE protective sheet treated to ensure paint adhesion of both solvent and waterborne paints specific for vehicle painting jobs.

It delivers superior paint adhesion due to the electrostatic property which is a result of the Corona treatment and the composition of the raw material with specific additives.

Q1® Premium Protecting film clings to vehicles and has centered printing to assist with alignment.



---

**Features**

- Elastic characteristics for exceptional conformability
- Ideal for both Solvent and Water based products
- Corona treated for maximum particle adhesion
- “Easy Tear” Technology – no zippering
- “A” folded for easy application
- Rip resistant construction
- Clings to the surface
- No bleed through

---

**Benefits**

- Easy to use dispenser box provides fast application
- Statically charge for easy masking
- No bleed through
- Paint absorbent
- Solvent resistant
- Tear resistant

---

**Temperature Resistance**

230° F. / 110° C.

---

**Product Reference**

---

Part #	Size	Pcs/ Case
PF012	12ft X 400ft / 3.66m X 122m	1 roll/Box
PF016	16ft X 350ft / 4.9m X 107m	1 roll/Box

---

## Premium Foam Masking Tape

Q1® Premium Foam Masking Tape is designed to protect door edges and gaps from overspray while providing a smooth edge reducing time to complete the job.

Traditional flat masking tape can leave paint lines when used inside apertures. Others must be rolled to create a sort of soft edge. The unique design of this tape helps to create an edge faster than other classic jamb masking techniques. Dust and other contaminants are sealed in preventing them from damaging the paint job. The tape can also be left in place during the final prep phase to help reduce compound and polish from entering jamb areas.



### Features

- Specially designed polyurethane foam structure
- Highly absorbent to avoid any leaking and paint runs
- Flexible
- Easy clean up and removal
- Solvent resistant
- Easy roll release in a box dispenser
- Temperature rating 176° F. / 80° C.

### Benefits

- Easy to shape on contours, mask and seals all jambs
- Good adhesion to vehicle surfaces
- Withstands paint booth bake cycles
- Prevents overspray from penetrating into the jamb
- Improves productivity by reducing the time required to mask jambs with tape and masking paper
- Leaves no residue

### Temperature Resistance

176° F. / 80° C.

### Product Reference

Part #	Size	Pcs/ Case
SE01	13mm x 50 m	1 roll/Box



Premium Masking Solutions

**Q1® is a Brand of**  
**PPM Industries S.p.A**  
Distributed in USA, Canada  
& Caribbean Islands by  
**National Oak Distributors Inc.**  
6529 Southern Blvd.  
West Palm Beach, FL 33413

Discover  
more



Follow us  
on



[q1tapes.com](http://q1tapes.com)

